

TUM

INSTITUT FÜR INFORMATIK

Higher Order Finite Elements on Sparse Grids

H.-J. Bungartz



TUM-I9502
Februar 1995

TUM-INFO-02-1995-I9502-/.-FI
Alle Rechte vorbehalten
Nachdruck auch auszugsweise verboten

©1995 MATHEMATISCHES INSTITUT UND
INSTITUT FÜR INFORMATIK
TECHNISCHE UNIVERSITÄT MÜNCHEN

Druck: Mathematisches Institut und
 Institut für Informatik der
 Technischen Universität München

Higher Order Finite Elements on Sparse Grids ^{*}

H.-J. Bungartz [†]

Abstract — Zusammenfassung

Higher Order Finite Elements on Sparse Grids. We present a general technique to construct hierarchical bases of higher order suitable for sparse grid methods without increasing the number of degrees of freedom. For the solution of elliptic partial differential equations, this approach allows us to profit both from the efficiency of sparse grid discretizations and from the advantages of higher order basis functions with regard to their approximation accuracy.

We report the results of some first numerical experiments concerning piecewise biquadratic hierarchical basis functions.

AMS(MOS) Subject Classifications: 65N22, 65N30, 65N50

Key words: Finite element method, hierarchical bases, higher order techniques, partial differential equations, sparse grids.

Finite Elemente höherer Ordnung auf dünnen Gittern. Wir stellen ein Verfahren zur Konstruktion hierarchischer Basen höherer Ordnung vor, die für den Einsatz in Dünngitteralgorithmen geeignet sind und nicht zu einer Erhöhung der Anzahl der Freiheitsgrade führen. Im Zusammenhang mit der Lösung elliptischer partieller Differentialgleichungen erlaubt es dieser Ansatz, sowohl die Effizienz von Dünngitterdiskretisierungen als auch die Vorteile von Basisfunktionen höherer Ordnung hinsichtlich ihrer Approximationsgenauigkeit zu nutzen.

Für den Fall stückweise biquadratischer hierarchischer Basisfunktionen werden die Ergebnisse erster numerischer Experimente diskutiert.

1 Introduction

Since their presentation in 1990 [17], sparse grids have turned out to be a very interesting approach for the efficient solution of elliptic partial differential equations and for a lot of other topics in numerical analysis like numerical integration [4] or FFT [13]. In comparison to the standard full grid approach, the number of grid points can be reduced significantly from $O(N^d)$ to $O(N(\log_2(N))^{d-1})$ or even $O(N)$ in the d -dimensional case, whereas the accuracy of the sparse grid interpolant and of the approximation to the solution of the given boundary value problem, resp., is

^{*}This work is supported by the Bayerische Forschungsförderung via FORTWIHR — The Bavarian Consortium for High Performance Scientific Computing.

[†]Institut für Informatik der Technischen Universität München, D-80290 München, Germany.

only slightly deteriorated: For piecewise d -linear basis functions, an accuracy of the order $O(N^{-2}(\log_2(N))^{d-1})$ with respect to the L_2 - or the maximum norm and of the order $O(N^{-1})$ with respect to the energy norm has been shown [6]. Furthermore, regular sparse grids can be extended in a very simple and natural manner to adaptive ones, which makes the hierarchical sparse grid concept applicable to problems that require adaptive grid refinement, too.

For the two-dimensional case, the results mentioned above show that, apart from the logarithmic factor and with respect to the L_2 -norm, sparse grid techniques with piecewise bilinear (biquadratic, bicubic, ...) hierarchical basis functions correspond to full grid methods of fourth (sixth, eighth, ...) order. In the three-dimensional case, the gain in order is even more impressive. Therefore, sparse grids are well-suited for the efficient realization of higher order finite element methods. Finally, p - or h - p -version-type algorithms on sparse grids seem to be a very promising approach that allows us to profit both from the sparse grid efficiency, from the advantages of usual h -adaptivity, and from the improved approximation quality of higher order basis functions.

In this paper, first, a short introduction to sparse grid methods recalls their most important properties. Then, a new concept for generating higher order hierarchical bases on sparse grids is presented, followed by some first numerical results for the case of piecewise biquadratic basis functions. Finally, some concluding remarks and an outlook on further work to be done will close the discussion.

2 Sparse Grids

The use of hierarchical bases for finite element discretizations as proposed by Yserentant [16] and Bank, Dupont, and Yserentant [3] instead of standard nodal bases stood at the beginning of the sparse grid idea, together with a tensor-product-type approach for the generalization from the one-dimensional to the d -dimensional case. For the corresponding subspace splitting of a full grid discretization space in two dimensions with piecewise bilinear hierarchical basis functions as in figure (1), it can be seen that the dimension (i. e., the number of grid points) of all subspaces with $i_1 + i_2 = c$ is 2^{c-2} . Furthermore, it has been shown in [6] that the contribution of all those subspaces with $i_1 + i_2 = c$ to the interpolant of a function u is of the same order $O(2^{-2c})$ with respect to the L_2 - or maximum norm and $O(2^{-c})$ with regard to the energy norm, if u fulfills the smoothness requirement $\frac{\partial^4 u}{\partial x_1^2 \partial x_2^2} \in \mathcal{C}^0(\bar{\Omega})$ for the two-dimensional and $\frac{\partial^{2d} u}{\partial x_1^2 \dots \partial x_d^2} \in \mathcal{C}^0(\bar{\Omega})$ for the general d -dimensional case, respectively. Here, Ω denotes the underlying domain. Therefore, it turns out to be more reasonable to deal with a triangular subspace scheme as given in figure (2) instead of using the quadratic scheme of figure (1). This leads us to the so-called *sparse grids*. For a formal definition of sparse grids, see [6] or [17], e.g.

Besides the regular sparse grids that result from skipping certain subspaces according to figure (2), adaptive grid refinement can be realized in the sparse grid context in a very straightforward way. Since we use recursive dynamic data structures like

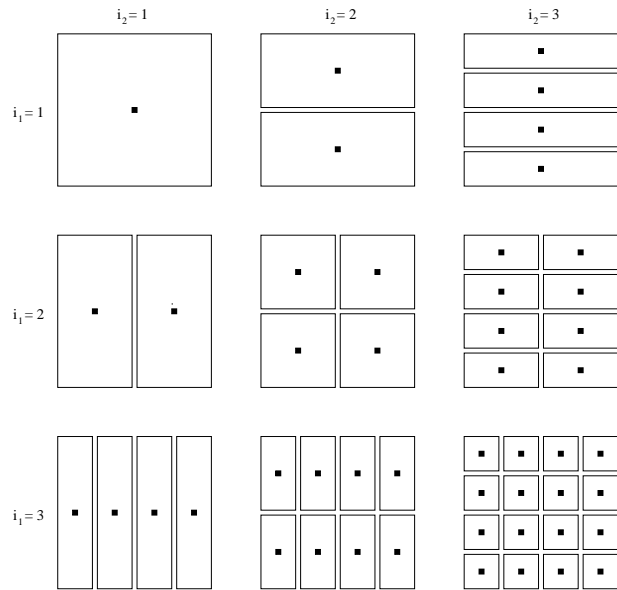


Figure 1: Subspace splitting of a full grid space.

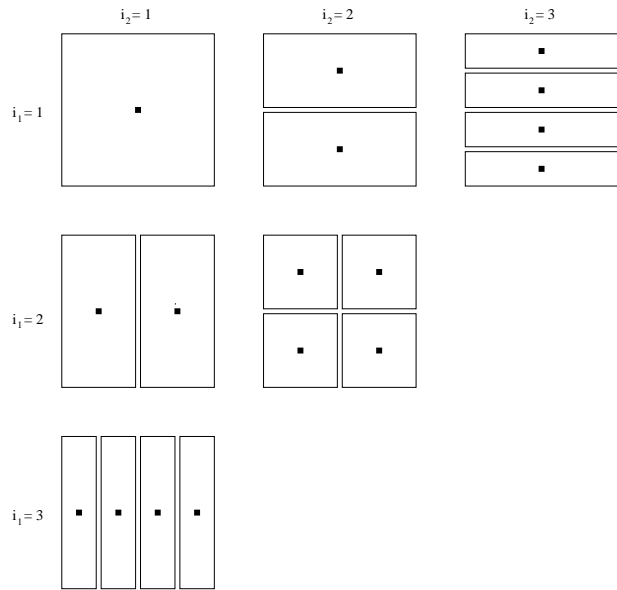


Figure 2: Subspace splitting of a sparse grid space.

binary trees for the implementation, and since the value of a hierarchical basis function, the hierarchical surplus, can be used itself to indicate the smoothness of u at the corresponding grid point and, consequently, the necessity to refine the grid here, no additional work has to be done to implement adaptive refinement. Figure (3) shows a two-dimensional regular sparse grid and a three-dimensional adaptive one with singularities at the re-entrant corner and along the edges.

Speaking about the most important properties of sparse grids, we at least have to look at the number of grid points involved and at the approximation accuracy of piecewise d -linear hierarchical basis functions on sparse grids. For a detailed

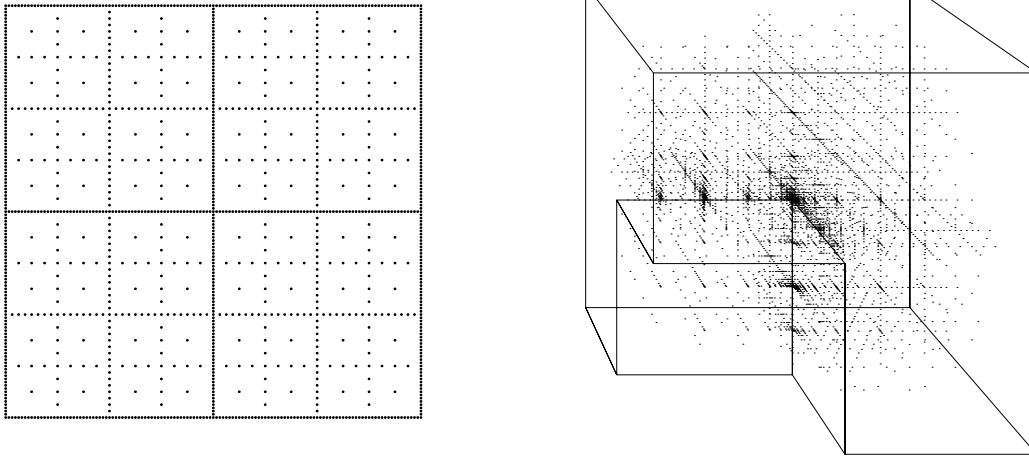


Figure 3: Regular and adaptive sparse grid.

analysis, we once again refer to [6] and [17]. For a d -dimensional problem, the approach described above and illustrated in figure (2) leads to regular sparse grids with $O(N(\log_2(N))^{d-1})$ grid points, if N denotes the number of grid points in one dimension (i. e., $\frac{1}{N}$ is the smallest mesh width occurring). A variant also discussed in [6] even leads to regular sparse grids with $O(N)$ grid points. These results have to be compared with the $O(N^d)$ points of regular full grids. Concerning the approximation quality, the accuracy of the sparse grid interpolant is only slightly deteriorated from $O(N^{-2})$ to $O(N^{-2}(\log_2(N))^{d-1})$ with respect to the L_2 - or maximum norm. With regard to the energy norm, both the sparse grid interpolant and the finite element approximation to the solution of the given boundary value problem stay of the order $O(N^{-1})$.

Thus, sparse grids enable us to gain a factor of 2 in accuracy for arbitrary number d of dimensions by just doubling the number of grid points. Since the smoothness requirements can be overcome by adaptive grid refinement, sparse grids are a very efficient approach for the solution of partial differential equations.

Recently, the class of problems that can be treated with sparse grid methods has been significantly extended. First experiments with time-dependent problems have been reported by Balder et al. in [2], Pflaum [14] generalized the algorithm for the solution of the Poisson equation to the case of general elliptic differential operators of second order in two dimensions, and Dornseifer developed a mapping technique to deal with curvilinear domains. Furthermore, systems of equations like the Stokes equations are the focus of present sparse grid interest.

A first step towards higher order techniques on sparse grids has been done by Störtkuhl [15]. He uses piecewise bicubic hierarchical Hermite polynomials for the solution of the biharmonic equation. This approach with C^1 -elements leads to continuous and differentiable sparse grid functions and needs four degrees of freedom per grid point. In the following, we present an alternative approach based on C^0 -elements with still one degree of freedom per grid point.

3 A Concept for Generating Higher Order Hierarchical Bases on Sparse Grids

3.1 A Quadratic Hierarchical Basis

For reasons of clarity, let us study the one-dimensional case of a regular grid with N grid points, $N = 2^n + 1$, $n \in \mathbb{N}$, and N values to be interpolated, first. For the construction of a piecewise quadratic interpolant, one has to fix three degrees of freedom in each interval between two neighbouring grid points. This leads to a total of $3N - 3$ degrees of freedom for the whole problem. It is well-known that quadratic splines are perhaps the most common way to construct a suitable interpolant. With splines, we need N degrees of freedom to get an interpolant and twice $N - 2$ degrees of freedom to make the interpolant both continuous and differentiable at the inner grid points. With one more condition fixed (some kind of boundary condition, e. g.), the interpolant is definitely determined. Thus, the higher order of the polynomials used leads to more smoothness of the interpolant. This effect is especially attractive, if smooth functions are to be interpolated, or if partial differential equations of higher order (like the biharmonic equation, e. g., see [15]) have to be solved. However, in a lot of other situations (like the numerical treatment of singularities, e. g.), it seems to be neither necessary nor desirable.

Therefore, we suggest a construction that leads to an interpolant (N degrees of freedom) which is only continuous ($N - 2$ degrees of freedom). The remaining $N - 1$ degrees of freedom are fixed by interpolation conditions outside the respective interval. For instance, the parabolic interpolant between two neighbouring grid points i and $i + 1$, $1 \leq i \leq N - 1$, could be determined by either the values at the grid points $i - 1$, i , and $i + 1$ (if $i > 1$) or the values at the nodes i , $i + 1$, and $i + 2$ (if $i < N - 1$) or even the values at the grid points i , $i + 1$, and an arbitrary third point. Since we want to define hierarchical bases, it turns out to be the best choice to determine the third grid point for interpolation by means of an hierarchical criterion: If i is a grid point on the finest level only, i. e., if i is even, then $i - 1$, i , and $i + 1$ are taken into account. If, on the other hand, i is a coarse grid point (i. e. odd) and if, thus, $i + 1$ does appear on the finest grid only, then i , $i + 1$, and $i + 2$ are the points chosen for interpolation. The result of this approach is shown in figure (4). On the intervals $[2k + 1, 2k + 3]$, $0 \leq k \leq (N - 3)/2$, the resulting overall interpolant is quadratic, but at the (coarse) grid points $2k + 1$, it may be not differentiable.

Starting from these considerations, we now introduce a piecewise quadratic hierarchical basis. To explain the principles, we first look at the well-known piecewise linear case in one dimension. If we add appropriate basis functions at the coarse grid points to the hierarchical basis functions of each level, we get nested spaces of piecewise linear functions on the different levels (see figure (5)). Here, a coarse grid function can be constructed by summing up three neighbouring fine grid functions with the weights $\frac{1}{2}$, 1 , and $\frac{1}{2}$. This is important for a simple switch from one level to another, and it is necessary for the efficient implementation of sparse grid

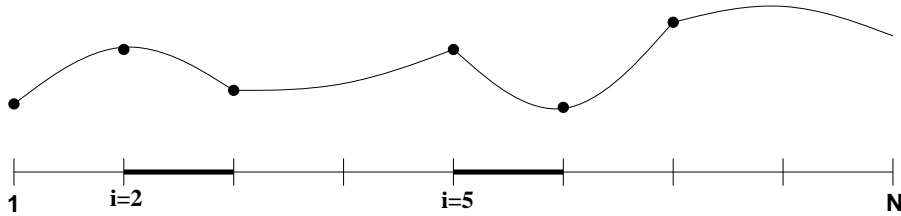


Figure 4: Piecewise quadratic C^0 -interpolant.

algorithms.

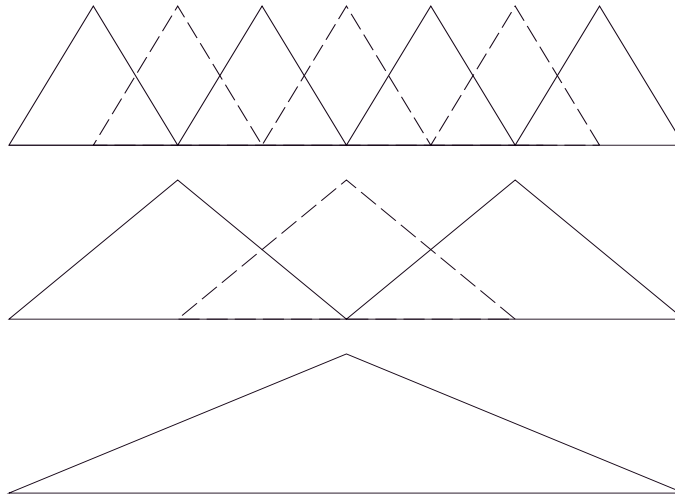


Figure 5: Linear hierarchical basis and nodal point bases on each level.

The quadratic case turns out to be a little bit more complicated, because it is not possible to get a quadratic basis function on the coarse grid as a weighted sum of three neighbouring quadratic basis functions on the fine grid. However, if we sum up two quadratic fine grid functions with the weight $\frac{1}{4}$ and one standard piecewise linear coarse grid function with the weight 1 as indicated in figure (6), we get the desired quadratic function on the coarse grid.

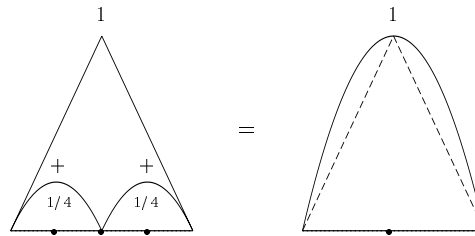


Figure 6: Switching from fine to coarse level with quadratic hierarchical basis functions.

Now, figure (7) shows our piecewise quadratic hierarchical basis (solid lines), together with the extension to a nodal point basis on each level (dashed lines). Note that each of these nodal bases consists of basis functions whose supports vary in size.

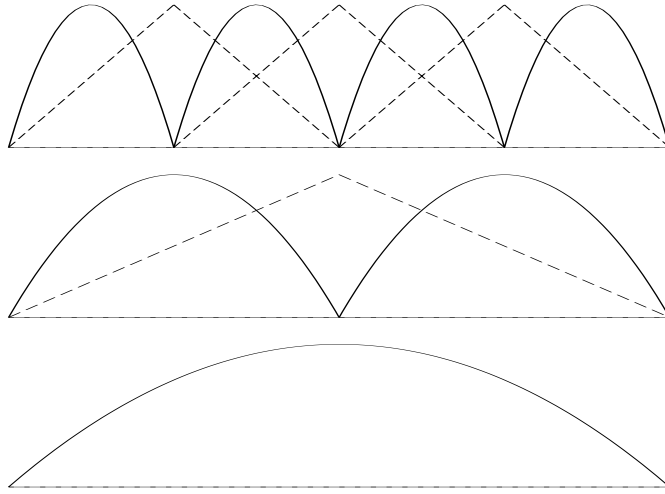


Figure 7: Quadratic hierarchical basis and nodal point bases on each level.

As in the linear case, the generalization to a d -dimensional piecewise d -quadratic hierarchical basis with $d > 1$ is done by the tensor product approach that is typical for the sparse grid context.

Another important problem we have to deal with is the question how to calculate the (quadratic) hierarchical surplus. Again, we first look at the one-dimensional case. The linear hierarchical surplus $v_m^{(l)}$ in a grid point m with hierarchical neighbours $e(m)$ and $w(m)$ is given by

$$v_m^{(l)} = u_m - \frac{1}{2} \cdot (u_{e(m)} + u_{w(m)}), \quad (1)$$

where u_m , $u_{e(m)}$, and $u_{w(m)}$ denote the values of the underlying function u at the respective grid points. Remember that the hierarchical neighbours of a grid point m are just the two ends of the support of the hierarchical basis function located in m . The corresponding formula for the quadratic hierarchical surplus $v_m^{(q)}$ depends on the hierarchical relations of the involved grid points. Figure (8) illustrates the situation if $e(m)$ is the father of m (with respect to the underlying binary tree) and if $e(e(m))$ is the father of $e(m)$.

A short calculation leads to

$$\begin{aligned} v_m^{(q)} &= -\frac{3}{8} \cdot u_{w(m)} + u_m - \frac{3}{4} \cdot u_{e(m)} + \frac{1}{8} \cdot u_{e(e(m))} \\ &= \left(-\frac{1}{2} \cdot u_{w(m)} + u_m - \frac{1}{2} \cdot u_{e(m)} \right) - \frac{1}{4} \left(-\frac{1}{2} \cdot u_{w(m)} + u_{e(m)} - \frac{1}{2} \cdot u_{e(e(m))} \right), \end{aligned}$$

i. e., the quadratic hierarchical surplus at a grid point m can be easily calculated with the help of the linear hierarchical surplus at m and the linear surplus at the father of m :

$$v_m^{(q)} = v_m^{(l)} - \frac{1}{4} \cdot v_{e(m)}^{(l)}. \quad (2)$$

Thus, as in the linear case, nothing else has to be stored than the linear hierarchical surplus. Again, the tensor product approach leads to a generalization of this result

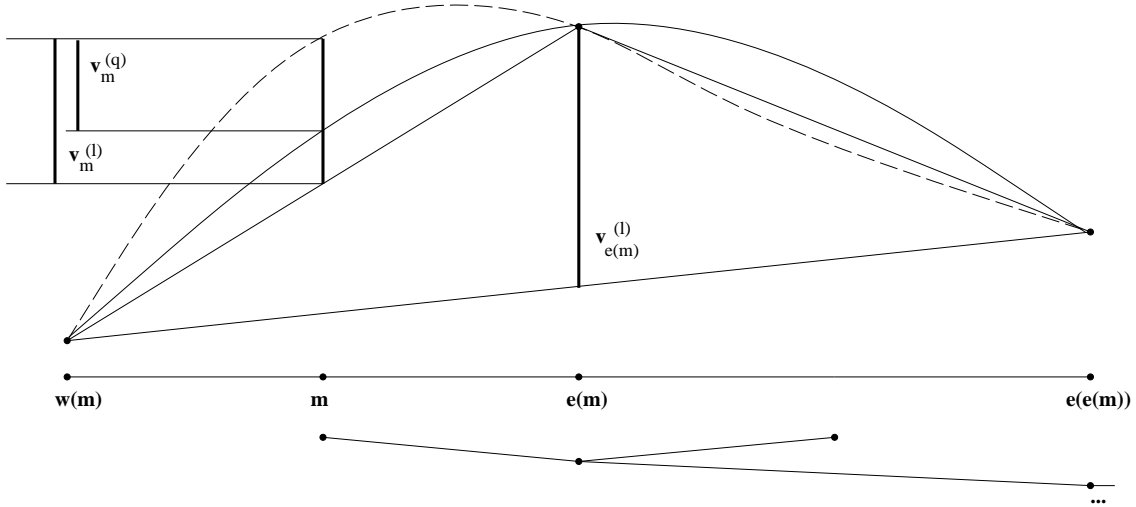


Figure 8: Linear and quadratic hierarchical surplus.

to the d -dimensional case with $d > 1$. For $d = 2$, e.g., we immediately get

$$v_m^{(q)} = v_m^{(l)} - \frac{1}{4} \cdot v_{e(m)}^{(l)} - \frac{1}{4} \cdot v_{n(m)}^{(l)} + \frac{1}{16} \cdot v_{ne(m)}^{(l)}, \quad (3)$$

where $e(m)$ denotes the father of m in x -direction, $n(m)$ the father of m in y -direction, and $ne(m)$ the father of $n(m)$ in x -direction (see figure (9)). For arbitrary d , the quadratic hierarchical surplus is given by

$$v_m^{(q,d)} = \left[1, -\frac{1}{4}\right]^d \cdot v_{\bullet}^{(l,d)}. \quad (4)$$

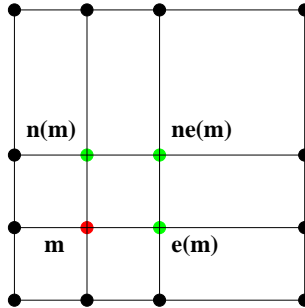


Figure 9: Calculation of the quadratic hierarchical surplus for $d = 2$.

3.2 Theoretical Results

Now, we turn to the approximation properties of sparse grids with the quadratic hierarchical basis introduced above. To this end, we study the behaviour of the

interpolation error with respect to the L_2 -, the maximum, and the energy norm. According to finite element theory, the latter one gives insight into the error of the finite element solution, too.

In the main, the notation and the argumentation follow the linear case from [6]. Because of (2) and (4), we look at

$$J_m^{(q,1)} := J_m^{(l,1)} - \frac{1}{4} \cdot J_{e(m)}^{(l,1)} \quad (5)$$

for the one-dimensional case or

$$J_m^{(q,d)} := \left[1, -\frac{1}{4}\right]^d \cdot J_{\bullet}^{(l,d)} \quad (6)$$

for the general d -dimensional case. Here, for some sufficiently smooth function $u^{(d)}$ of d independent variables, $J_m^{(l,d)}$ is the integral well-known from linear sparse grid theory,

$$J_m^{(l,d)} := \int_{-h_1}^{+h_1} \dots \int_{-h_d}^{+h_d} \left(\prod_{j=1}^d \frac{-h_j}{2} \cdot w_j(x_j) \right) \cdot \frac{\partial^{2d} u^{(d)}(x_1, \dots, x_d)}{\partial x_1^2 \dots \partial x_d^2} dx_d \dots dx_1, \quad (7)$$

at a grid point m (here normed to 0) with assigned piecewise linear hierarchical basis function $\prod_{j=1}^d w_j(x_j)$,

$$w_j(x_j) := \begin{cases} \frac{h_j+x_j}{h_j}, & \text{if } -h_j \leq x_j \leq 0, \\ \frac{h_j-x_j}{h_j}, & \text{if } 0 \leq x_j \leq h_j, \\ 0 & \text{otherwise.} \end{cases} \quad (8)$$

Since we know from [6] that $J_m^{(l,d)}$ is just the linear hierarchical surplus $v_m^{(l,d)}$ at point m , we get

$$J_m^{(q,d)} = \left[1, -\frac{1}{4}\right]^d \cdot J_{\bullet}^{(l,d)} = \left[1, -\frac{1}{4}\right]^d \cdot v_{\bullet}^{(l,d)} = v_m^{(q,d)}. \quad (9)$$

In the following, we study the situation for $d = 1$, first. Together with (7) and (8) for $d = 1$, (5) leads to

$$\begin{aligned} J_m^{(q,1)} &= J_m^{(l,1)} - \frac{1}{4} \cdot J_{e(m)}^{(l,1)} \\ &= \int_{-h_1}^{3h_1} t_1(x_1) \cdot \frac{\partial^2 u^{(1)}(x_1)}{\partial x_1^2} dx_1, \end{aligned}$$

where $e(m)$ again denotes the hierarchical father of m with assigned support $[-h_1, 3h_1]$ and

$$t_1(x_1) := \frac{1}{8} \cdot \begin{cases} -3x_1 - 3h_1, & \text{if } -h_1 \leq x_1 \leq 0, \\ 5x_1 - 3h_1, & \text{if } 0 \leq x_1 \leq h_1, \\ -x_1 + 3h_1, & \text{if } h_1 \leq x_1 \leq 3h_1. \end{cases} \quad (10)$$

By partial integration for each sub-interval $[-h_1, 0]$, $[0, h_1]$, and $[h_1, 3h_1]$, and by elimination of the resulting h_1^2 -terms (which is possible here in contrast to the linear case), we get

$$J_m^{(q,1)} = - \int_{-h_1}^{3h_1} T_1(x_1) \cdot \frac{\partial^3 u^{(1)}(x_1)}{\partial x_1^3} dx_1, \quad (11)$$

where

$$T_1(x_1) := \frac{1}{16} \cdot \begin{cases} -3x_1^2 - 6h_1x_1 - 3h_1^2, & \text{if } -h_1 \leq x_1 \leq 0, \\ 5x_1^2 - 6h_1x_1 - 3h_1^2, & \text{if } 0 \leq x_1 \leq h_1, \\ -x_1^2 + 6h_1x_1 - 9h_1^2, & \text{if } h_1 \leq x_1 \leq 3h_1. \end{cases} \quad (12)$$

Together with (6) and (7), this result can be used to derive the generalization for the d -dimensional case. After a short calculation, we get

$$J_m^{(q,d)} = (-1)^d \cdot \int_{-h_1}^{3h_1} \dots \int_{-h_d}^{3h_d} \left(\prod_{j=1}^d T_j(x_j) \right) \cdot \frac{\partial^{3d} u^{(d)}(x_1, \dots, x_d)}{\partial x_1^3 \dots \partial x_d^3} dx_d \dots dx_1, \quad (13)$$

where $T_j(x_j)$ is defined in an analogous way to (12).

With (9) and (13), we are able to give two bounds for the quadratic hierarchical surplus $v_m^{(q,d)}$:

$$\left| v_m^{(q,d)} \right| = \left| J_m^{(q,d)} \right| \leq \left\| \frac{\partial^{3d} u^{(d)}}{\partial x_1^3 \dots \partial x_d^3} \right\|_{\infty} \cdot \frac{1}{2^d} \cdot h_1^3 \cdot \dots \cdot h_d^3 \quad (14)$$

and

$$\left| v_m^{(q,d)} \right| = \left| J_m^{(q,d)} \right| \leq \left\| \frac{\partial^{3d} (u^{(d)} \cdot \varphi_m^{(d)})}{\partial x_1^3 \dots \partial x_d^3} \right\|_2 \cdot \left(\frac{17}{160} \right)^{d/2} \cdot h_1^{5/2} \cdot \dots \cdot h_d^{5/2}, \quad (15)$$

where $\varphi_m^{(d)}(x_1, \dots, x_d)$ denotes the characteristic function of the support of the basis function located at point (h_1, \dots, h_d) , if m is normed to the origin.

Finally, we have to calculate the L_2 - and maximum norm of the d -quadratic hierarchical basis function $\prod_{j=1}^d g_j(x_j)$,

$$g_j(x_j) = \frac{(h_j - x_j) \cdot (x_j + h_j)}{h_j^2}, \quad -h_j \leq x_j \leq h_j, \quad (16)$$

which is now used instead of the piecewise d -linear $\prod_{j=1}^d w_j(x_j)$ defined in (8). We get

$$\begin{aligned} \left\| \prod_{j=1}^d g_j(x_j) \right\|_{\infty} &= 1, \\ \left\| \prod_{j=1}^d g_j(x_j) \right\|_2 &= \left(\frac{16}{15} \right)^{d/2} \cdot h_1^{1/2} \cdot \dots \cdot h_d^{1/2}. \end{aligned} \quad (17)$$

Now, we are ready to apply standard sparse grid approximation theory to the situation of piecewise d -quadratic hierarchical basis functions. We are first interested in the difference between a sufficiently smooth function $u^{(d)}$ and its piecewise d -quadratic sparse grid interpolant $\tilde{u}_{n,I}^{(d)}$ of level n with smallest occurring mesh width 2^{-n} . Analogously to the linear case, (14), (15), and (17) lead to

$$\|u^{(d)} - \tilde{u}_{n,I}^{(d)}\|_{\infty} \leq \left\| \frac{\partial^{3d} u^{(d)}}{\partial x_1^3 \dots \partial x_d^3} \right\|_{\infty} \cdot B(n, d) \cdot \left(\frac{1}{14}\right)^d \cdot 8^{-n} \quad (18)$$

and

$$\|u^{(d)} - \tilde{u}_{n,I}^{(d)}\|_2 \leq \left\| \frac{\partial^{3d} u^{(d)}}{\partial x_1^3 \dots \partial x_d^3} \right\|_2 \cdot B(n, d) \cdot \left(\frac{17}{525}\right)^{d/2} \cdot 8^{-n}, \quad (19)$$

where

$$B(n, d) := 1 + \sum_{i=1}^{d-1} \left(\frac{7}{8}\right)^i \cdot \binom{n+i-1}{i}.$$

Consequently, we get for the sparse grid interpolation error $u^{(d)} - \tilde{u}_{n,I}^{(d)}$

$$\begin{aligned} \|u^{(d)} - \tilde{u}_{n,I}^{(d)}\|_{\infty} &= O(8^{-n} n^{d-1}) = O(N^{-3} (\log_2(N))^{d-1}), \\ \|u^{(d)} - \tilde{u}_{n,I}^{(d)}\|_2 &= O(8^{-n} n^{d-1}) = O(N^{-3} (\log_2(N))^{d-1}), \end{aligned} \quad (20)$$

where $N = 2^n + 1$ denotes the maximum number of grid points in one direction. Thus, in comparison to the standard regular full grid, the accuracy of the interpolation is only slightly deteriorated by the logarithmic factor $(\log_2(N))^{d-1}$. Note that, according to the above argumentation and on the analogy of the piecewise linear case, $u^{(d)}$ has to fulfill the following smoothness requirement:

$$\frac{\partial^{3d} u^{(d)}}{\partial x_1^3 \dots \partial x_d^3} \in C^0(\bar{\Omega}). \quad (21)$$

With respect to the energy norm, we again have to look at our d -quadratic hierarchical basis function $\prod_{j=1}^d g_j(x_j)$, first:

$$\begin{aligned} \left\| \prod_{j=1}^d g_j(x_j) \right\|_E^2 &= \int_{-h_1}^{+h_1} \dots \int_{-h_d}^{+h_d} \sum_{l=1}^d \left(\frac{\partial \prod_{j=1}^d g_j(x_j)}{\partial x_l} \right)^2 dx_d \dots dx_1 \\ &= \int_{-h_1}^{+h_1} \dots \int_{-h_d}^{+h_d} \sum_{l=1}^d \left(\prod_{j \neq l} \frac{(h_j^2 - x_j^2)^2}{h_j^4} \cdot \frac{4x_l^2}{h_l^4} \right) dx_d \dots dx_1 \\ &= \sum_{l=1}^d \left(\left(\frac{16}{15}\right)^{d-1} \cdot \left(\prod_{j \neq l} h_j \right) \cdot \frac{8}{3} \cdot \frac{1}{h_l} \right) \\ &= \frac{8}{3} \cdot \left(\frac{16}{15}\right)^{d-1} \cdot \sum_{l=1}^d \frac{h_1 \cdot \dots \cdot h_d}{h_l^2}. \end{aligned}$$

As above, this result concerning $\prod_{j=1}^d g_j(x_j)$ and (14) are the starting point for standard sparse grid analysis, which finally results in

$$\|u^{(d)} - \tilde{u}_{n,I}^{(d)}\|_E = O(4^{-n}) = O(N^{-2}), \quad (22)$$

the desired bound for the sparse grid interpolation error $u^{(d)} - \tilde{u}_{n,I}^{(d)}$ with regard to the energy norm. Thus, as in the linear case, the order of the energy error does not deteriorate when we switch from full grids to sparse ones. Since it is a well-known fact from finite element analysis that the finite element solution $\tilde{u}_n^{(d)}$ of a given boundary value problem is a best approximation to the solution $u^{(d)}$ on the underlying grid, we also get the following result concerning the error $u^{(d)} - \tilde{u}_n^{(d)}$ of the finite element approximation:

$$\|u^{(d)} - \tilde{u}_n^{(d)}\|_E = O(4^{-n}) = O(N^{-2}). \quad (23)$$

4 First Numerical Experiments

In this section, we report the results of some first numerical experiments concerning the piecewise quadratic hierarchical basis described above. For that, we study the Laplace equation on the unit square with Dirichlet boundary conditions as a simple model problem:

$$\begin{aligned} \Delta u &= 0 \quad \text{on } \bar{\Omega} = [0, 1]^2, \\ u &= \sin(\pi y) \cdot \frac{\sinh(\pi(1-x))}{\sinh(\pi)}. \end{aligned}$$

Figure (10) shows the approximation to the solution calculated on the regular sparse grid of level 10 and its error.

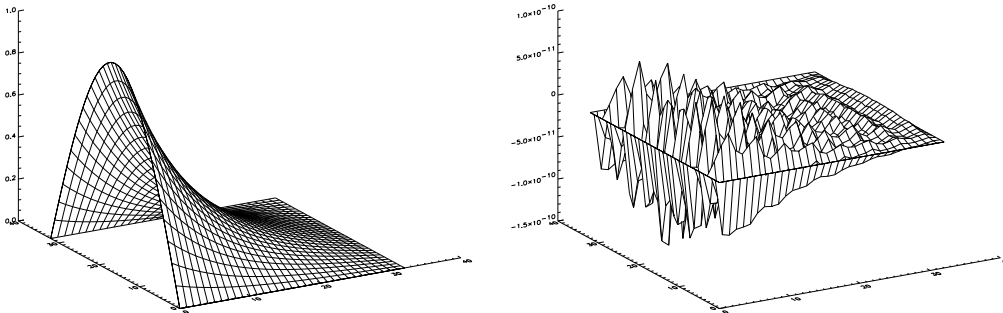


Figure 10: Sparse grid solution (left) and error (right) of the model problem.

For the solution of the linear system that results from the finite element discretization on the sparse grid, a simple Gauss-Seidel-iteration was used. The numerical results for this model problem are given in table (1). There, n denotes the level of the regular sparse grids considered (i. e., 2^{-n} is the smallest mesh width occurring). $\|e\|_\infty$ indicates the maximum norm of the sparse grid error $u^{(d)} - \tilde{u}_n^{(d)}$, and $\|e\|_E$ denotes its energy norm. Finally, ρ_∞ and ρ_E indicate the rates of reduction from level n to level $n+1$ of the respective error, and dof_n denotes the number of degrees of freedom, i. e. the number of grid points of the respective sparse grid. In table (1) and in figure (11), one can clearly see the $O(4^{-n}) = O(N^{-2})$ -behaviour of the

energy norm, and the convergence with respect to the maximum norm turns out to be just slightly worse than $O(8^{-n})$, as it was to be expected due to the logarithmic factor in (20).

n	$\ e\ _\infty$	ρ_∞	$\ e\ _E$	ρ_E	dof_n
1	$2.53 \cdot 10^{-3}$	1.02	$2.43 \cdot 10^{-1}$	3.02	1
2	$2.48 \cdot 10^{-3}$		$8.05 \cdot 10^{-2}$	3.41	5
3	$9.28 \cdot 10^{-4}$	2.67	$2.36 \cdot 10^{-2}$	3.77	17
4	$2.96 \cdot 10^{-4}$	3.14	$6.26 \cdot 10^{-3}$	3.91	49
5	$7.24 \cdot 10^{-5}$	4.09	$1.60 \cdot 10^{-3}$	3.98	129
6	$1.35 \cdot 10^{-5}$	5.36	$4.02 \cdot 10^{-4}$	3.98	321
7	$2.18 \cdot 10^{-6}$	6.19	$1.01 \cdot 10^{-4}$	4.02	769
8	$3.19 \cdot 10^{-7}$	6.83	$2.51 \cdot 10^{-5}$	3.99	1793
9	$4.38 \cdot 10^{-8}$	7.28	$6.29 \cdot 10^{-6}$	4.01	4097
10	$5.76 \cdot 10^{-9}$	7.60	$1.57 \cdot 10^{-6}$	3.99	9217
11	$7.42 \cdot 10^{-10}$	7.76	$3.93 \cdot 10^{-7}$	4.00	20481
12	$9.41 \cdot 10^{-11}$	7.89	$9.82 \cdot 10^{-8}$	3.99	45057
13	$1.19 \cdot 10^{-11}$	7.94	$2.46 \cdot 10^{-8}$	4.01	98305
14	$1.49 \cdot 10^{-12}$	7.97	$6.14 \cdot 10^{-9}$		212993

Table 1: Error on the regular sparse grid of level n .

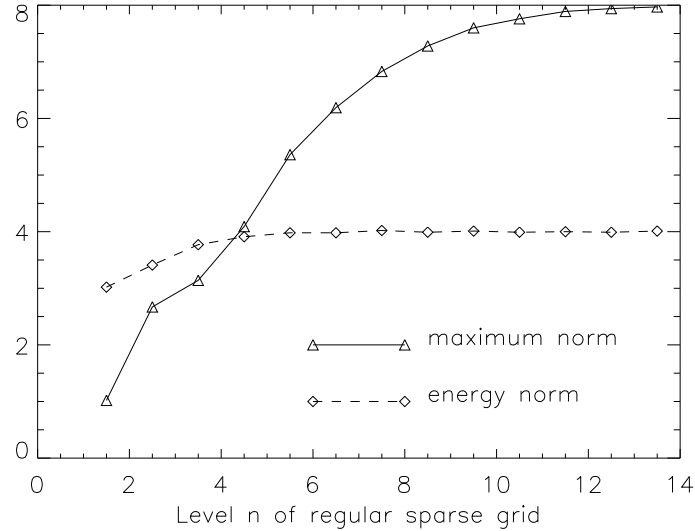


Figure 11: Rates ρ_∞ and ρ_E of error reduction.

Furthermore, in figure (12), the results for the piecewise quadratic case are compared

to the piecewise linear situation. Here, both times, adaptive sparse grids were used. Again, the advantages of the quadratic approach can be seen clearly.

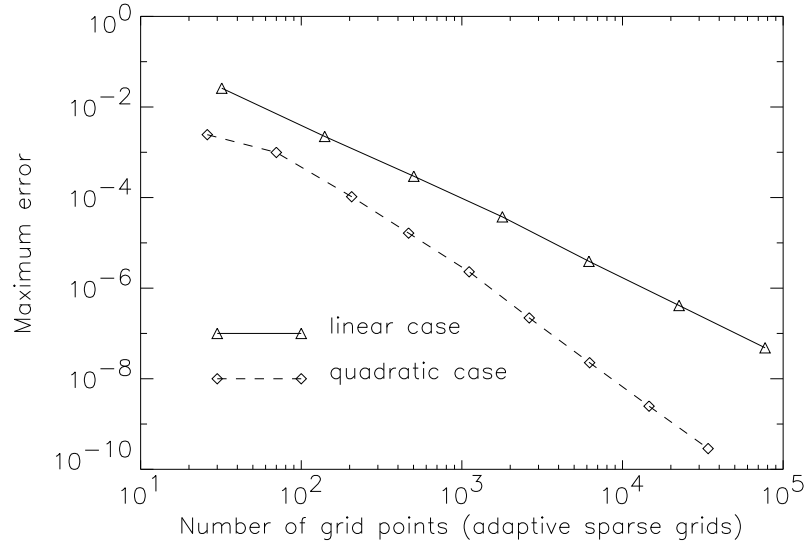


Figure 12: Maximum error vs. number of grid points (linear and quadratic case).

5 Concluding Remarks

In this paper, some first steps towards an efficient implementation of higher order techniques on sparse grids have been discussed. The approach of section 3 leads to hierarchical bases of polynomials of higher degree $p > 1$, but still results in C^0 -(sparse grid)-interpolants. However, the number of degrees of freedom per grid point does not increase with growing p . Obviously, the concepts presented for the quadratic case can be generalized to the situation with cubic polynomials, and so on, which will be in the centre of future work. Finally, h - p -version-type algorithms [1, 11, 12] are to be developed for sparse grids, too.

The following tables (2) and (3) show why higher order techniques on sparse grids seem to be a very promising approach to the efficient numerical treatment of partial differential equations. Each row in both tables corresponds to a fixed number d of dimensions of the underlying problem, and each column stands for a certain polynomial degree p of the basis functions used. If M denotes the overall number of unknowns (i. e., $M = N^d$ for a regular full grid and $M = O(N(\log_2(N))^{d-1})$ or $M = O(N)$, respectively, for regular sparse grids), then, we can indicate the order of approximation with respect to the energy norm by $M^{-\alpha}$. The entries in both tables now show the respective values of α . For example, if we want to achieve second order with respect to the number of unknowns on full grids, i. e. $\alpha = 2$, we have to use quadratic polynomials in the one-dimensional case, quartic ones for $d = 2$, and for three-dimensional problems, even polynomials of degree $p = 6$ have

to be used. With sparse grids, in contrast to that, p does not depend on d . For $\alpha = 2$, quadratic polynomials are sufficient for arbitrary d .

$d \setminus p$	1	2	3	4	5	6
1	1	2	3	4	5	6
2	1/2	1	3/2	2	5/2	3
3	1/3	2/3	1	4/3	5/3	2

Table 2: Approximation order $M^{-\alpha}$ for various d and p on full grids.

$d \setminus p$	1	2	3	4	5	6
1	1	2	3	4	5	6
2	1	2	3	4	5	6
3	1	2	3	4	5	6

Table 3: Approximation order $M^{-\alpha}$ for various d and p on sparse grids.

At this point, we have to go into the smoothness requirements of sparse grid techniques. For the quadratic case, they are given in (21). At first glance, these seem to be quite restrictive, especially for larger p . However, as in the linear case, the inherent h -adaptivity of sparse grid techniques should be able to deal with non-smooth situations, too. Furthermore, we can learn from tables (2) and (3) that, with respect to the overall number of unknowns, sparse grids can manage with smaller values of p than full grids do. Therefore, especially for achieving high approximation quality for three-dimensional problems, sparse grids even turn out to be advantageous regarding smoothness requirements.

Acknowledgements. I am indebted to Prof. Christoph Zenger for many fruitful discussions and suggestions.

References

- [1] I. BABUŠKA AND M. SURI, *The p - and h - p -versions of the finite element method: An overview*, Comput. Methods Appl. Mech. Engrg., 80 (1990), pp. 5–26.
- [2] R. BALDER, U. RÜDE, S. SCHNEIDER, AND C. ZENGER, *Sparse grid and extrapolation methods for parabolic problems*, in Proceedings of the 10th International Conference on Computational Methods in Water Resources, Heidelberg, Juli 1994, A. Peters, G. Wittum, B. Herrling, and U. Meissner, eds., Kluwer academic publishers, 1994.
- [3] R. E. BANK, T. DUPONT, AND H. YSERENTANT, *The hierarchical basis multigrid method*, Numerische Mathematik, 52 (1988), pp. 427–458.

- [4] T. BONK, *A new algorithm for multi-dimensional adaptive numerical quadrature*, in Proceedings of the 9th GAMM-Seminar, Kiel, January 1993, W. Hackbusch, ed., Vieweg, Braunschweig, 1994.
- [5] H.-J. BUNGARTZ, *An adaptive Poisson solver using hierarchical bases and sparse grids*, in Iterative Methods in Linear Algebra: Proceedings of the IMACS International Symposium, Brussels, 2.-4. 4. 1991, P. de Groen and R. Beauwens, eds., Elsevier, Amsterdam, 1992, pp. 293–310.
- [6] ———, *Dünne Gitter und deren Anwendung bei der adaptiven Lösung der dreidimensionalen Poisson-Gleichung*, Dissertation, Institut für Informatik, TU München, 1992.
- [7] H.-J. BUNGARTZ, M. GRIEBEL, D. RÖSCHKE, AND C. ZENGER, *Pointwise convergence of the combination technique for Laplace's equation*, East-West Journal of Numerical Mathematics, 2 (1994), pp. 21–45.
- [8] H.-J. BUNGARTZ, M. GRIEBEL, AND U. RÜDE, *Extrapolation, combination, and sparse grid techniques for elliptic boundary value problems*, Comput. Methods Appl. Mech. Engrg., 116 (1994), pp. 243–252.
- [9] M. GRIEBEL, *Parallel multigrid methods on sparse grids*, in Multigrid Methods III: Proceedings of the 3rd European Conference on Multigrid Methods, Bonn, October 1990, W. Hackbusch and U. Trottenberg, eds., Int. Ser. Num. Math. 98, Birkhäuser, Basel, 1991, pp. 211–221.
- [10] ———, *A parallelizable and vectorizable multi-level algorithm on sparse grids*, in Parallel Algorithms for Partial Differential Equations: Proceedings of the 6th GAMM-Seminar, Kiel, January 1990, Notes on Numerical Fluid Mechanics 31, W. Hackbusch, ed., Vieweg, Braunschweig, 1991, pp. 94–100.
- [11] B. GUO AND I. BABUŠKA, *The h-p-version of the finite element method (Part 1: The basic approximation results)*, Computational Mechanics, 1 (1986), pp. 21–41.
- [12] ———, *The h-p-version of the finite element method (Part 2: General results and applications)*, Computational Mechanics, 1 (1986), pp. 203–220.
- [13] K. HALLATSCHKEK, *Fouriertransformation auf dünnen Gittern mit hierarchischen Basen*, Numer. Math., 63 (1992), pp. 83–97.
- [14] C. PFLAUM, *A multi-level-algorithm for the finite-element-solution of general second order elliptic differential equations on adaptive sparse grids*, SFB Report 342/12/94 A, Institut für Informatik, TU München, 1994.
- [15] T. STÖRTKUHL, *Ein numerisches, adaptives Verfahren zur Lösung der biharmonischen Gleichung auf dünnen Gittern*, Dissertation, Institut für Informatik, TU München, 1994.
- [16] H. YSERENTANT, *On the multilevel splitting of finite element spaces*, Numer. Math., 49 (1986), pp. 379–412.
- [17] C. ZENGER, *Sparse grids*, in Parallel Algorithms for Partial Differential Equations: Proceedings of the 6th GAMM-Seminar, Kiel, January 1990, Notes on Numerical Fluid Mechanics 31, W. Hackbusch, ed., Vieweg, Braunschweig, 1991.

SFB 342: Methoden und Werkzeuge für die Nutzung paralleler
Rechnerarchitekturen

bisher erschienen :

Reihe A

- 342/1/90 A Robert Gold, Walter Vogler: Quality Criteria for Partial Order Semantics of Place/Transition-Nets, Januar 1990
- 342/2/90 A Reinhard Fößmeier: Die Rolle der Lastverteilung bei der numerischen Parallelprogrammierung, Februar 1990
- 342/3/90 A Klaus-Jörn Lange, Peter Rossmanith: Two Results on Unambiguous Circuits, Februar 1990
- 342/4/90 A Michael Griebel: Zur Lösung von Finite-Differenzen- und Finite-Element-Gleichungen mittels der Hierarchischen Transformations-Mehrgitter-Methode
- 342/5/90 A Reinhold Letz, Johann Schumann, Stephan Bayerl, Wolfgang Bibel: SETHEO: A High-Performance Theorem Prover
- 342/6/90 A Johann Schumann, Reinhold Letz: PARTHEO: A High Performance Parallel Theorem Prover
- 342/7/90 A Johann Schumann, Norbert Trapp, Martin van der Koelen: SETHEO/PARTHEO Users Manual
- 342/8/90 A Christian Suttner, Wolfgang Ertel: Using Connectionist Networks for Guiding the Search of a Theorem Prover
- 342/9/90 A Hans-Jörg Beier, Thomas Bemmerl, Arndt Bode, Hubert Ertl, Olav Hansen, Josef Haunerding, Paul Hofstetter, Jaroslav Kremenek, Robert Lindhof, Thomas Ludwig, Peter Luksch, Thomas Tremel: TOPSYS, Tools for Parallel Systems (Artikelsammlung)
- 342/10/90 A Walter Vogler: Bisimulation and Action Refinement
- 342/11/90 A Jörg Desel, Javier Esparza: Reachability in Reversible Free-Choice Systems
- 342/12/90 A Rob van Glabbeek, Ursula Goltz: Equivalences and Refinement
- 342/13/90 A Rob van Glabbeek: The Linear Time - Branching Time Spectrum
- 342/14/90 A Johannes Bauer, Thomas Bemmerl, Thomas Tremel: Leistungsanalyse von verteilten Beobachtungs- und Bewertungswerkzeugen
- 342/15/90 A Peter Rossmanith: The Owner Concept for PRAMs
- 342/16/90 A G. Böckle, S. Trosch: A Simulator for VLIW-Architectures
- 342/17/90 A P. Slavkovsky, U. Rüde: Schnellere Berechnung klassischer Matrix-Multiplikationen
- 342/18/90 A Christoph Zenger: SPARSE GRIDS

Reihe A

- 342/19/90 A Michael Griebel, Michael Schneider, Christoph Zenger: A combination technique for the solution of sparse grid problems
- 342/20/90 A Michael Griebel: A Parallelizable and Vectorizable Multi- Level-Algorithm on Sparse Grids
- 342/21/90 A V. Diekert, E. Ochmanski, K. Reinhardt: On confluent semi-commutations-decidability and complexity results
- 342/22/90 A Manfred Broy, Claus Dendorfer: Functional Modelling of Operating System Structures by Timed Higher Order Stream Processing Functions
- 342/23/90 A Rob van Glabbeek, Ursula Goltz: A Deadlock-sensitive Congruence for Action Refinement
- 342/24/90 A Manfred Broy: On the Design and Verification of a Simple Distributed Spanning Tree Algorithm
- 342/25/90 A Thomas Bemmerl, Arndt Bode, Peter Braun, Olav Hansen, Peter Luksch, Roland Wismüller: TOPSYS - Tools for Parallel Systems (User's Overview and User's Manuals)
- 342/26/90 A Thomas Bemmerl, Arndt Bode, Thomas Ludwig, Stefan Tritscher: MMK - Multiprocessor Multitasking Kernel (User's Guide and User's Reference Manual)
- 342/27/90 A Wolfgang Ertel: Random Competition: A Simple, but Efficient Method for Parallelizing Inference Systems
- 342/28/90 A Rob van Glabbeek, Frits Vaandrager: Modular Specification of Process Algebras
- 342/29/90 A Rob van Glabbeek, Peter Weijland: Branching Time and Abstraction in Bisimulation Semantics
- 342/30/90 A Michael Griebel: Parallel Multigrid Methods on Sparse Grids
- 342/31/90 A Rolf Niedermeier, Peter Rossmanith: Unambiguous Simulations of Auxiliary Pushdown Automata and Circuits
- 342/32/90 A Inga Niepel, Peter Rossmanith: Uniform Circuits and Exclusive Read PRAMs
- 342/33/90 A Dr. Hermann Hellwagner: A Survey of Virtually Shared Memory Schemes
- 342/1/91 A Walter Vogler: Is Partial Order Semantics Necessary for Action Refinement?
- 342/2/91 A Manfred Broy, Frank Dederichs, Claus Dendorfer, Rainer Weber: Characterizing the Behaviour of Reactive Systems by Trace Sets
- 342/3/91 A Ulrich Furbach, Christian Suttner, Bertram Fronhöfer: Massively Parallel Inference Systems
- 342/4/91 A Rudolf Bayer: Non-deterministic Computing, Transactions and Recursive Atomicity
- 342/5/91 A Robert Gold: Dataflow semantics for Petri nets

Reihe A

- 342/6/91 A A. Heise; C. Dimitrovici: Transformation und Komposition von P/T-Netzen unter Erhaltung wesentlicher Eigenschaften
- 342/7/91 A Walter Vogler: Asynchronous Communication of Petri Nets and the Refinement of Transitions
- 342/8/91 A Walter Vogler: Generalized OM-Bisimulation
- 342/9/91 A Christoph Zenger, Klaus Hallatschek: Fouriertransformation auf dünnen Gittern mit hierarchischen Basen
- 342/10/91 A Erwin Loibl, Hans Obermaier, Markus Pawlowski: Towards Parallelism in a Relational Database System
- 342/11/91 A Michael Werner: Implementierung von Algorithmen zur Kompaktifizierung von Programmen für VLIW-Architekturen
- 342/12/91 A Reiner Müller: Implementierung von Algorithmen zur Optimierung von Schleifen mit Hilfe von Software-Pipelining Techniken
- 342/13/91 A Sally Baker, Hans-Jörg Beier, Thomas Bemmerl, Arndt Bode, Hubert Ertl, Udo Graf, Olav Hansen, Josef Haunerding, Paul Hofstetter, Rainer Knödlseher, Jaroslav Kremenek, Siegfried Langenbuch, Robert Lindhof, Thomas Ludwig, Peter Luksch, Roy Milner, Bernhard Ries, Thomas Treml: TOPSYS - Tools for Parallel Systems (Artikelsammlung); 2., erweiterte Auflage
- 342/14/91 A Michael Griebel: The combination technique for the sparse grid solution of PDE's on multiprocessor machines
- 342/15/91 A Thomas F. Gritzner, Manfred Broy: A Link Between Process Algebras and Abstract Relation Algebras?
- 342/16/91 A Thomas Bemmerl, Arndt Bode, Peter Braun, Olav Hansen, Thomas Treml, Roland Wismüller: The Design and Implementation of TOPSYS
- 342/17/91 A Ulrich Furbach: Answers for disjunctive logic programs
- 342/18/91 A Ulrich Furbach: Splitting as a source of parallelism in disjunctive logic programs
- 342/19/91 A Gerhard W. Zumbusch: Adaptive parallele Multilevel-Methoden zur Lösung elliptischer Randwertprobleme
- 342/20/91 A M. Jobmann, J. Schumann: Modelling and Performance Analysis of a Parallel Theorem Prover
- 342/21/91 A Hans-Joachim Bungartz: An Adaptive Poisson Solver Using Hierarchical Bases and Sparse Grids
- 342/22/91 A Wolfgang Ertel, Theodor Gemenis, Johann M. Ph. Schumann, Christian B. Suttner, Rainer Weber, Zongyan Qiu: Formalisms and Languages for Specifying Parallel Inference Systems
- 342/23/91 A Astrid Kiehn: Local and Global Causes
- 342/24/91 A Johann M.Ph. Schumann: Parallelization of Inference Systems by using an Abstract Machine

Reihe A

- 342/25/91 A Eike Jessen: Speedup Analysis by Hierarchical Load Decomposition
- 342/26/91 A Thomas F. Gritzner: A Simple Toy Example of a Distributed System: On the Design of a Connecting Switch
- 342/27/91 A Thomas Schnekenburger, Andreas Weininger, Michael Friedrich: Introduction to the Parallel and Distributed Programming Language ParMod-C
- 342/28/91 A Claus Dendorfer: Funktionale Modellierung eines Postsystems
- 342/29/91 A Michael Griebel: Multilevel algorithms considered as iterative methods on indefinite systems
- 342/30/91 A W. Reisig: Parallel Composition of Liveness
- 342/31/91 A Thomas Bemmerl, Christian Kasperbauer, Martin Mairandres, Bernhard Ries: Programming Tools for Distributed Multiprocessor Computing Environments
- 342/32/91 A Frank Leßke: On constructive specifications of abstract data types using temporal logic
- 342/1/92 A L. Kanal, C.B. Suttner (Editors): Informal Proceedings of the Workshop on Parallel Processing for AI
- 342/2/92 A Manfred Broy, Frank Dederichs, Claus Dendorfer, Max Fuchs, Thomas F. Gritzner, Rainer Weber: The Design of Distributed Systems - An Introduction to FOCUS
- 342/2-2/92 A Manfred Broy, Frank Dederichs, Claus Dendorfer, Max Fuchs, Thomas F. Gritzner, Rainer Weber: The Design of Distributed Systems - An Introduction to FOCUS - Revised Version (erschienen im Januar 1993)
- 342/3/92 A Manfred Broy, Frank Dederichs, Claus Dendorfer, Max Fuchs, Thomas F. Gritzner, Rainer Weber: Summary of Case Studies in FOCUS - a Design Method for Distributed Systems
- 342/4/92 A Claus Dendorfer, Rainer Weber: Development and Implementation of a Communication Protocol - An Exercise in FOCUS
- 342/5/92 A Michael Friedrich: Sprachmittel und Werkzeuge zur Unterstützung paralleler und verteilter Programmierung
- 342/6/92 A Thomas F. Gritzner: The Action Graph Model as a Link between Abstract Relation Algebras and Process-Algebraic Specifications
- 342/7/92 A Sergei Gorlatch: Parallel Program Development for a Recursive Numerical Algorithm: a Case Study
- 342/8/92 A Henning Spruth, Georg Sigl, Frank Johannes: Parallel Algorithms for Slicing Based Final Placement
- 342/9/92 A Herbert Bauer, Christian Sporrer, Thomas Krodel: On Distributed Logic Simulation Using Time Warp
- 342/10/92 A H. Bungartz, M. Griebel, U. Rüde: Extrapolation, Combination and Sparse Grid Techniques for Elliptic Boundary Value Problems

Reihe A

- 342/11/92 A M. Griebel, W. Huber, U. Rde, T. Strtkuhl: The Combination Technique for Parallel Sparse-Grid-Preconditioning and -Solution of PDEs on Multiprocessor Machines and Workstation Networks
- 342/12/92 A Rolf Niedermeier, Peter Rossmanith: Optimal Parallel Algorithms for Computing Recursively Defined Functions
- 342/13/92 A Rainer Weber: Eine Methodik fr die formale Anforderungsspezifikation verteilter Systeme
- 342/14/92 A Michael Griebel: Grid- and point-oriented multilevel algorithms
- 342/15/92 A M. Griebel, C. Zenger, S. Zimmer: Improved multilevel algorithms for full and sparse grid problems
- 342/16/92 A J. Desel, D. Gomm, E. Kindler, B. Paech, R. Walter: Bausteine eines kompositionalen Beweiskalkls fr netzmodellierte Systeme
- 342/17/92 A Frank Dederichs: Transformation verteilter Systeme: Von applikativen zu prozeduralen Darstellungen
- 342/18/92 A Andreas Listl, Markus Pawlowski: Parallel Cache Management of a RDBMS
- 342/19/92 A Erwin Loibl, Markus Pawlowski, Christian Roth: PART: A Parallel Relational Toolbox as Basis for the Optimization and Interpretation of Parallel Queries
- 342/20/92 A Jrg Desel, Wolfgang Reisig: The Synthesis Problem of Petri Nets
- 342/21/92 A Robert Balder, Christoph Zenger: The d-dimensional Helmholtz equation on sparse Grids
- 342/22/92 A Ilko Michler: Neuronale Netzwerk-Paradigmen zum Erlernen von Heuristiken
- 342/23/92 A Wolfgang Reisig: Elements of a Temporal Logic. Coping with Concurrency
- 342/24/92 A T. Strtkuhl, Chr. Zenger, S. Zimmer: An asymptotic solution for the singularity at the angular point of the lid driven cavity
- 342/25/92 A Ekkart Kindler: Invariants, Compositionality and Substitution
- 342/26/92 A Thomas Bonk, Ulrich Rde: Performance Analysis and Optimization of Numerically Intensive Programs
- 342/1/93 A M. Griebel, V. Thurner: The Efficient Solution of Fluid Dynamics Problems by the Combination Technique
- 342/2/93 A Ketil Stlen, Frank Dederichs, Rainer Weber: Assumption / Commitment Rules for Networks of Asynchronously Communicating Agents
- 342/3/93 A Thomas Schnekenburger: A Definition of Efficiency of Parallel Programs in Multi-Tasking Environments
- 342/4/93 A Hans-Joachim Bungartz, Michael Griebel, Dierk Rschke, Christoph Zenger: A Proof of Convergence for the Combination Technique for the Laplace Equation Using Tools of Symbolic Computation

Reihe A

- 342/5/93 A Manfred Kunde, Rolf Niedermeier, Peter Rossmanith: Faster Sorting and Routing on Grids with Diagonals
- 342/6/93 A Michael Griebel, Peter Oswald: Remarks on the Abstract Theory of Additive and Multiplicative Schwarz Algorithms
- 342/7/93 A Christian Sporrer, Herbert Bauer: Corolla Partitioning for Distributed Logic Simulation of VLSI Circuits
- 342/8/93 A Herbert Bauer, Christian Sporrer: Reducing Rollback Overhead in Time-Warp Based Distributed Simulation with Optimized Incremental State Saving
- 342/9/93 A Peter Slavkovsky: The Visibility Problem for Single-Valued Surface ($z = f(x,y)$): The Analysis and the Parallelization of Algorithms
- 342/10/93 A Ulrich Rde: Multilevel, Extrapolation, and Sparse Grid Methods
- 342/11/93 A Hans Regler, Ulrich Rde: Layout Optimization with Algebraic Multigrid Methods
- 342/12/93 A Dieter Barnard, Angelika Mader: Model Checking for the Modal Mu-Calculus using Gau Elimination
- 342/13/93 A Christoph Pflaum, Ulrich Rde: Gau' Adaptive Relaxation for the Multilevel Solution of Partial Differential Equations on Sparse Grids
- 342/14/93 A Christoph Pflaum: Convergence of the Combination Technique for the Finite Element Solution of Poisson's Equation
- 342/15/93 A Michael Luby, Wolfgang Ertel: Optimal Parallelization of Las Vegas Algorithms
- 342/16/93 A Hans-Joachim Bungartz, Michael Griebel, Dierk Rschke, Christoph Zenger: Pointwise Convergence of the Combination Technique for Laplace's Equation
- 342/17/93 A Georg Stellner, Matthias Schumann, Stefan Lamberts, Thomas Ludwig, Arndt Bode, Martin Kiehl und Rainer Mehlhorn: Developing Multicomputer Applications on Networks of Workstations Using NXLib
- 342/18/93 A Max Fuchs, Ketil Stlen: Development of a Distributed Min/Max Component
- 342/19/93 A Johann K. Obermaier: Recovery and Transaction Management in Write-optimized Database Systems
- 342/20/93 A Sergej Gorlatch: Deriving Efficient Parallel Programs by Systematizing Coarsing Specification Parallelism
- 342/01/94 A Reiner Httl, Michael Schneider: Parallel Adaptive Numerical Simulation
- 342/02/94 A Henning Spruth, Frank Johannes: Parallel Routing of VLSI Circuits Based on Net Independency
- 342/03/94 A Henning Spruth, Frank Johannes, Kurt Antreich: PHRoute: A Parallel Hierarchical Sea-of-Gates Router

Reihe A

- 342/04/94 A Martin Kiehl, Rainer Mehlhorn, Matthias Schumann: Parallel Multiple Shooting for Optimal Control Problems Under NX/2
- 342/05/94 A Christian Suttner, Christoph Goller, Peter Krauss, Klaus-Jörn Lange, Ludwig Thomas, Thomas Schnekenburger: Heuristic Optimization of Parallel Computations
- 342/06/94 A Andreas Listl: Using Subpages for Cache Coherency Control in Parallel Database Systems
- 342/07/94 A Manfred Broy, Ketil Stølen: Specification and Refinement of Finite Dataflow Networks - a Relational Approach
- 342/08/94 A Katharina Spies: Funktionale Spezifikation eines Kommunikationsprotokolls
- 342/09/94 A Peter A. Krauss: Applying a New Search Space Partitioning Method to Parallel Test Generation for Sequential Circuits
- 342/10/94 A Manfred Broy: A Functional Rephrasing of the Assumption/Commitment Specification Style
- 342/11/94 A Eckhardt Holz, Ketil Stølen: An Attempt to Embed a Restricted Version of SDL as a Target Language in Focus
- 342/12/94 A Christoph Pflaum: A Multi-Level-Algorithm for the Finite-Element-Solution of General Second Order Elliptic Differential Equations on Adaptive Sparse Grids
- 342/13/94 A Manfred Broy, Max Fuchs, Thomas F. Gritzner, Bernhard Schätz, Katharina Spies, Ketil Stølen: Summary of Case Studies in FOCUS - a Design Method for Distributed Systems
- 342/14/94 A Maximilian Fuchs: Technologieabhängigkeit von Spezifikationen digitaler Hardware
- 342/15/94 A M. Griebel, P. Oswald: Tensor Product Type Subspace Splittings And Multilevel Iterative Methods For Anisotropic Problems
- 342/16/94 A Gheorghe Ștefănescu: Algebra of Flownomials
- 342/17/94 A Ketil Stølen: A Refinement Relation Supporting the Transition from Unbounded to Bounded Communication Buffers
- 342/18/94 A Michael Griebel, Tilman Neuhoeffer: A Domain-Oriented Multilevel Algorithm-Implementation and Parallelization
- 342/19/94 A Michael Griebel, Walter Huber: Turbulence Simulation on Sparse Grids Using the Combination Method
- 342/20/94 A Johann Schumann: Using the Theorem Prover SETHEO for verifying the development of a Communication Protocol in FOCUS - A Case Study -
- 342/01/95 A Hans-Joachim Bungartz: Higher Order Finite Elements on Sparse Grids

SFB 342: Methoden und Werkzeuge für die Nutzung paralleler Rechnerarchitekturen

bisher erschienen :

Reihe B

- 342/1/90 B Wolfgang Reisig: Petri Nets and Algebraic Specifications
- 342/2/90 B Jörg Desel: On Abstraction of Nets
- 342/3/90 B Jörg Desel: Reduction and Design of Well-behaved Free-choice Systems
- 342/4/90 B Franz Abstreiter, Michael Friedrich, Hans-Jürgen Plewan: Das Werkzeug runtime zur Beobachtung verteilter und paralleler Programme
- 342/1/91 B Barbara Paech: Concurrency as a Modality
- 342/2/91 B Birgit Kandler, Markus Pawlowski: SAM: Eine Sortier- Toolbox -Anwenderbeschreibung
- 342/3/91 B Erwin Loibl, Hans Obermaier, Markus Pawlowski: 2. Workshop über Parallelisierung von Datenbanksystemen
- 342/4/91 B Werner Pohlmann: A Limitation of Distributed Simulation Methods
- 342/5/91 B Dominik Gomm, Ekkart Kindler: A Weakly Coherent Virtually Shared Memory Scheme: Formal Specification and Analysis
- 342/6/91 B Dominik Gomm, Ekkart Kindler: Causality Based Specification and Correctness Proof of a Virtually Shared Memory Scheme
- 342/7/91 B W. Reisig: Concurrent Temporal Logic
- 342/1/92 B Malte Grosse, Christian B. Suttner: A Parallel Algorithm for Set-of-Support
Christian B. Suttner: Parallel Computation of Multiple Sets-of-Support
- 342/2/92 B Arndt Bode, Hartmut Wedekind: Parallelrechner: Theorie, Hardware, Software, Anwendungen
- 342/1/93 B Max Fuchs: Funktionale Spezifikation einer Geschwindigkeitsregelung
- 342/2/93 B Ekkart Kindler: Sicherheits- und Lebendigkeitseigenschaften: Ein Literaturüberblick
- 342/1/94 B Andreas Listl; Thomas Schnekenburger; Michael Friedrich: Zum Entwurf eines Prototypen für MIDAS